

# Kanlux

EAN: 5905339392305

## Surface-mounted LED panel Kanlux 39230 BLINGO AIO SRM40W 60



Date of issue: 17.02.2026, 12:15

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland [kanlux@kanlux.com](mailto:kanlux@kanlux.com)

EN

## PRODUCT PARAMETERS

Rated voltage [V]	220-240 AC
Rated frequency [Hz]	50
Maximum power [W]	max 40
Power factor	0.98
Luminous flux of the light fitting [lm]	4460/4900/4700
Correlated colour temperature [K]	3000/4000/6500
Power setting range [W]	31-40
Luminous flux setting range [lm]	3670-4900
Lighting angle [°]	115
Diode type	LED SMD
Integrated LED light source	yes
Colour consistency in McAdam ellipses	6
Colour temperature	warm white, white, cold white
Colour rendering index	90
Service life [h]	50000
Number of on/off cycles	≥50000
Place of application	Indoors
IP class	20
Compatible with a dimmer	no
Feeder included	yes
Supply-cord type	direct current
LED light source replaceability	Possibility of replacing the LED light source only by qualified personnel (only by the manufacturer service)
Control gear replaceability	Possibility of replacing the control equipment only by qualified personnel (only by the manufacturer service)
Product category according to 2019/2020/EU	Containing product (CP)
Mercury content in the lamp [mg]	0

## DIMENSIONS AND MOUNTING

Height [mm]	40
Width [mm]	595
Length [mm]	595
Place of assembly	ceiling mounted
Range of sections of wires used [mm <sup>2</sup> ]	0,75-2,5

## MATERIAL AND CONSTRUCTION

Colour	white
Enclosure material	steel
Lampshade material	plastic
Panel/frame material	steel
Class of protection against electric shock	I
Kształt	square
Minimum distance from the illuminated object	0,5m
Ambient temperature range to which the product can be exposed	5÷25

## LIGHT SOURCE PARAMETERS

On-mode power of the light source Pon [W]	6
Energy consumption in on-mode of the light source (kWh/1000h)	6
Energy efficiency class of the light source in the contains product (CP)	D
Number of modules (LED light source)	6
Useful luminous flux of the light source Φuse [lm]	880

## LOGISTICS

Unit of measurement	unit
Packaging method	5
Number of units in the secondary packaging	1
Number of units in the packaging	5
Net unit weight [g]	1804
Grammage [g]	2110
Gross unit weight [g]	2124
Length of a unit pack [cm]	60.5

Date of issue: 17.02.2026, 12:15

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com


## LIGHT SOURCE PARAMETERS

Useful luminous flux of the light source $\Phi_{use}$ [lm]	in sphere (360°)
Chromaticity coordinates (x)	0,38
Chromaticity coordinates (y)	0,38
R9 colour rendering index value	0
Survival factor	0,9
The lumen maintenance factor	0,96
Colour-tuneable light source	no
High luminance light source	no
Anti-glare shield	no
Dimmable	no

## ADDITIONAL INFORMATION

5 years Warranty under the terms of the warranty statement, available on our website

## RYSUNKI WYMIAROW

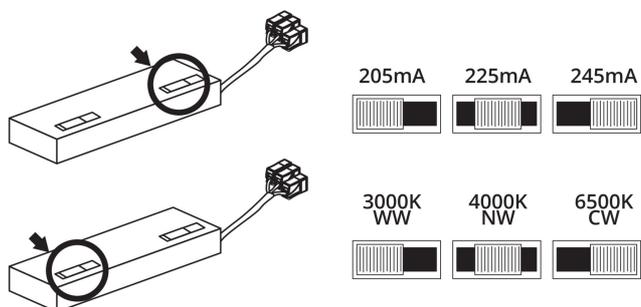

### BLINGO AIO

P(W)	mA	CCT(K)	$\Phi$ (lm)	lm/W
32	205	3000	3670	115
31	205	4000	3990	129
32	205	6500	3880	121
36	225	3000	4120	114
35	225	4000	4490	128
36	225	6500	4340	121
40	245	3000	4460	112
39	245	4000	4900	126
40	245	6500	4700	118


### BLINGO UAIO

P(W)	mA	CCT(K)	$\Phi$ (lm)	lm/W
32	205	3000	3300	103
31	205	4000	3580	115
32	205	6500	3490	109
36	225	3000	3700	103
35	225	4000	4050	116
36	225	6500	3920	109
40	245	3000	3990	100
39	245	4000	4370	112
40	245	6500	4210	105

## LOGISTICS


Width of a unit pack [cm]	4.5
Height of a unit pack [cm]	60.5
Weight of a cardboard box [kg]	10.55
Width of a cardboard box [cm]	25
Height of a cardboard box [cm]	62
Length of a cardboard box [cm]	61.5
Volume of a cardboard box [m <sup>3</sup> ]	0.095325

## PHOTOMETRIC DATA

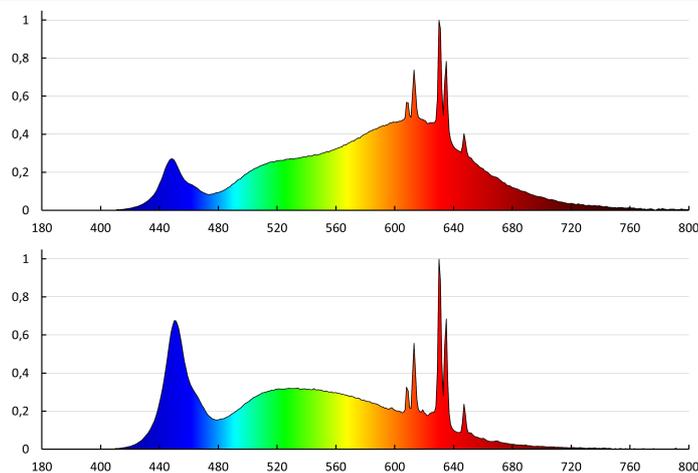

KANLUX S.A. (kat 39230) BLINGO AIO SRM40W 60 / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 39230) BLINGO AIO SRM40W 60  
Lampy: 1 x BLINGO AIO SRM40W 40W 30

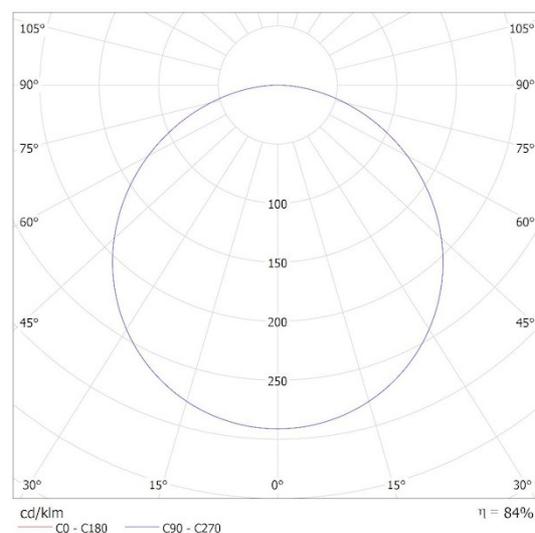

Date of issue: 17.02.2026, 12:15

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com