

Kanlux

EAN: 5905339392336

Surface-mounted LED panel Kanlux 39233 BLINGO UAIO SRM40W120



Date of issue: 17.02.2026, 12:17

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

EN

PRODUCT PARAMETERS

Rated voltage [V]	220-240 AC
Rated frequency [Hz]	50
Maximum power [W]	max 40
Power factor	0.98
Luminous flux of the light fitting [lm]	3990/4370/4210
Correlated colour temperature [K]	3000/4000/6500
Power setting range [W]	31-40
Luminous flux setting range [lm]	3300-4370
Lighting angle [°]	90
Diode type	LED SMD
Integrated LED light source	yes
Colour consistency in McAdam ellipses	6
Colour temperature	warm white, white, cold white
Colour rendering index	90
Service life [h]	50000
Number of on/off cycles	≥50000
Place of application	Indoors
IP class	20
Compatible with a dimmer	no
Feeder included	yes
Supply-cord type	direct current
UGR	<19
LED light source replaceability	Possibility of replacing the LED light source only by qualified personnel (only by the manufacturer service)
Control gear replaceability	Possibility of replacing the control equipment only by qualified personnel (only by the manufacturer service)
Product category according to 2019/2020/EU	Containing product (CP)
Mercury content in the lamp [mg]	0

DIMENSIONS AND MOUNTING

Height [mm]	40
Width [mm]	295
Length [mm]	1195
Place of assembly	ceiling mounted
Range of sections of wires used [mm ²]	0,75-2,5

MATERIAL AND CONSTRUCTION

Colour	white
Enclosure material	steel
Lampshade material	plastic
Panel/frame material	steel
Class of protection against electric shock	I
Kształt	rectangular
Minimum distance from the illuminated object	0,5m
Ambient temperature range to which the product can be exposed	5÷25

LIGHT SOURCE PARAMETERS

On-mode power of the light source Pon [W]	12
Energy consumption in on-mode of the light source (kWh/1000h)	12
Energy efficiency class	D
Energy efficiency class of the light source in the contains product (CP)	D
Number of modules (LED light source)	3

LOGISTICS

Unit of measurement	unit
Packaging method	5
Number of units in the secondary packaging	1
Number of units in the packaging	5
Net unit weight [g]	1898
Grammage [g]	2464
Gross unit weight [g]	2260

Date of issue: 17.02.2026, 12:17

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com


LIGHT SOURCE PARAMETERS

Useful luminous flux of the light source Φ_{use} [lm]	1620
Useful luminous flux of the light source Φ_{use} [lm]	in sphere (360°)
Chromaticity coordinates (x)	0,38
Chromaticity coordinates (y)	0,38
R9 colour rendering index value	0
Survival factor	0,9
The lumen maintenance factor	0,96
Colour-tuneable light source	no
High luminance light source	no
Anti-glare shield	no
Dimmable	no

ADDITIONAL INFORMATION

5 years Warranty under the terms of the warranty statement, available on our website



PHOTOMETRIC DATA

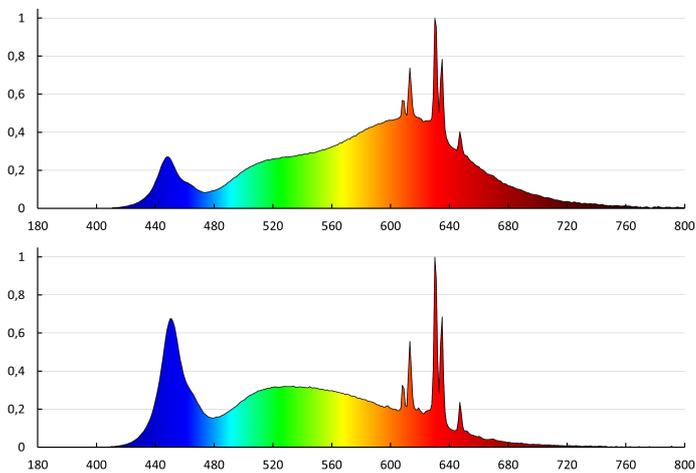

LOGISTICS

Length of a unit pack [cm]	120.5
Width of a unit pack [cm]	30.3
Height of a unit pack [cm]	4.8
Weight of a cardboard box [kg]	12.32
Width of a cardboard box [cm]	25
Height of a cardboard box [cm]	32
Length of a cardboard box [cm]	122
Volume of a cardboard box [m ³]	0.0976

RYSUNKI WYMIAROW

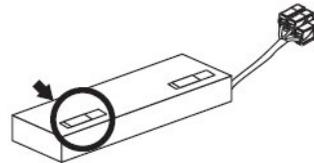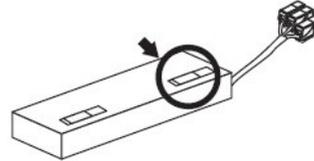

BLINGO UAIO

P(W)	mA	CCT(K)	Φ (lm)
32	205	3000	3300
31	205	4000	3580
32	205	6500	3490
36	225	3000	3700
35	225	4000	4050
36	225	6500	3920
40	245	3000	3990
39	245	4000	4370
40	245	6500	4210

Date of issue: 17.02.2026, 12:17

We reserve the right to make technical changes. The data contained in this material are not legally binding.


Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

PHOTOMETRIC DATA

KANLUX S.A. (kat 39233) BLINGO UAIO SRM40W120 / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 39233) BLINGO UAIO SRM40W120
Lampy: 1 x BLINGO UAIO SRM40W 32W 3

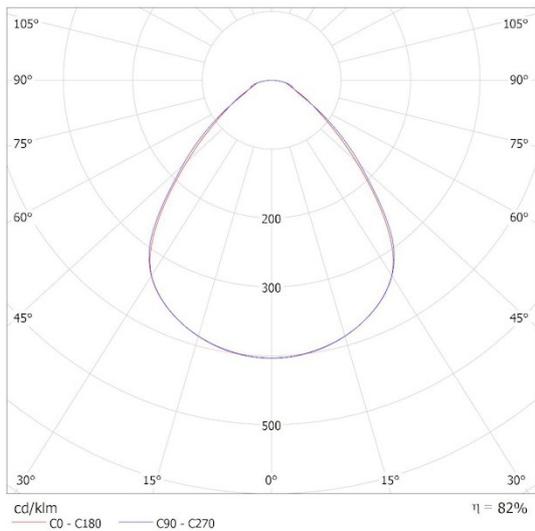

Date of issue: 17.02.2026, 12:17

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com